

PHOTOMETRICAL DATA

# ParLite LED

3.200K



Last Update: 05 January 2021

Please visit our website for the latest downloads: [www.coemar.com](http://www.coemar.com)




PHOTOMETRICAL DATA

ParLite LED 3.200K


Optic: 12°

Distance (m)	1	2	3	4	5	6	7	8	9	10	
Luminous Exitance (lux)	3.000K	58.320	14.580	6.480	3.645	2.333	1.620	1.190	911	720	583
1/2 P.A. ø (m)	0.23	0.46	0.69	0.92	1.15	1.38	1.61	1.84	2.07	2.30	
1/10 P.A. ø (m)	0.45	0.90	1.35	1.80	2.25	2.70	3.15	3.60	4.05	4.50	

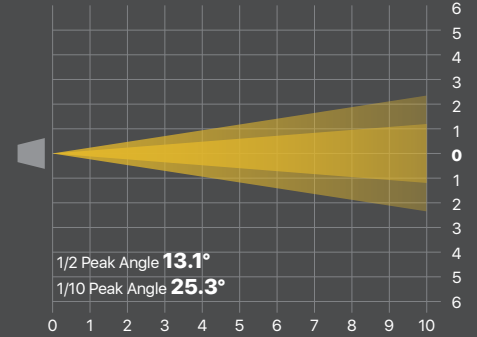


Optic: 30°

Distance (m)	1	2	3	4	5	6	7	8	9	10	
Luminous Exitance (lux)	3.000K	27.036	6.759	3.004	1.690	1.081	751	552	422	334	270
1/2 P.A. ø (m)	0.33	0.66	0.99	1.32	1.65	1.98	2.31	2.64	2.97	3.30	
1/10 P.A. ø (m)	0.69	1.38	2.07	2.76	3.45	4.14	4.83	5.52	6.21	6.90	

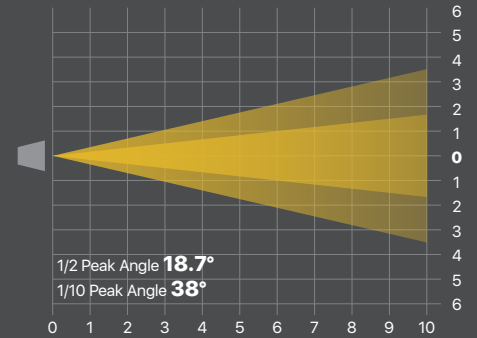

Optic: 50°

Distance (m)	1	2	3	4	5	6	7	8	9	10	
Luminous Exitance (lux)	3.000K	9.540	2.385	1.060	596	382	265	195	149	118	95
1/2 P.A. ø (m)	0.76	1.51	2.27	3.03	3.78	4.54	5.30	6.05	6.81	7.57	
1/10 P.A. ø (m)	1.14	2.29	3.43	4.57	5.72	6.86	8.00	9.15	10.29	11.43	

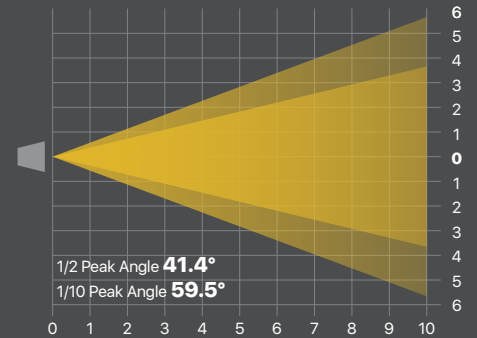

PHOTOMETRICAL DATA

ParLite LED 3.200K

Optic: 13°x40°

Distance (m)	1	2	3	4	5	6	7	8	9	10
<b>3.000K</b>	17.100	4.275	1.900	1.069	684	475	349	267	211	171
<b>1/2 P.A. ø (m)</b>	0.26x0.66	0.52x1.31	0.78x1.97	1.04x2.63	1.30x3.28	1.56x3.94	1.82x4.60	2.08x5.25	2.34x5.91	2.60x6.57
<b>1/10 P.A. ø (m)</b>	0.51x1.18	1.03x2.35	1.54x3.53	2.05x4.71	2.57x5.88	3.08x7.06	3.59x8.24	4.11x9.41	4.62x10.59	5.13x11.76

Luminous  
Emitance (lux)

